Protect MT-400fast
Fast-Cure Mortar Flooring System
Texture: T10

Epoxy Topcoat:
PIP 1000 FS
(10 – 12 mils)

Epoxy Grout Coat:
PIP 1000 Grout-FS
(8 – 10 mils)

Epoxy Mortar:
PIP 3600 EM
(w/ Accelerator)
(3/16")

Epoxy Primer:
PIP 3600 Primer
(w/ Accelerator)
(8 - 10 mils)

Properly Prepared
Concrete Substrate

Nominal System Thickness:
3/16"
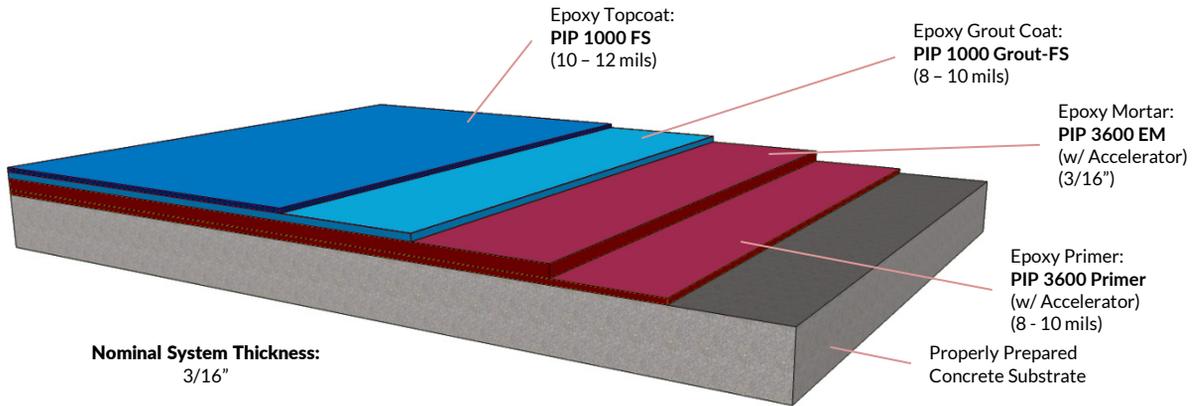
System Description:

A fast-cure, heavy-duty mortar system consisting of an accelerated epoxy primer followed by an application of an accelerated, trowel-applied epoxy mortar. The system is then coated with a fast-setting epoxy grout material and top coated with a fast-setting epoxy. This mortar system will resurface badly damaged concrete to a new, more durable surface. Suited for fast-tracking industrial concrete resurfacing applications where there is a limited shutdown window.

System Advantages:

- Very durable
- Excellent chemical resistance
- Resurfaces damaged concrete substrates
- Very good impact and abrasion resistance
- Quick turnaround with minimal downtime
- Available in a wide array of colors

System Installation Overview:

1. Apply PIP 3600 Primer (accelerated) to properly prepared substrate and allow to cure
2. Apply PIP 3600 EM epoxy mortar system (accelerated) and allow to cure
3. Apply PIP 1000 Grout-FS fast-setting epoxy grout coat and allow to cure
4. Apply PIP 1000 FS fast-setting epoxy topcoat and allow to cure

CONCRETE PROTECTION | CONTRACTOR PARTNER | CUSTOMER COMMITTED

800-974-1323
info@protectpoly.com
www.protectpoly.com